

Maximum Wind Energy Extraction by Using Neural Network Estimation and Predictive Control of Boost Converter

Mahdi Heidari^a

A
B
S
T
R
A
C
T

The power generation from wind turbine are variable because of dependence on environmental conditions and it is important to extract maximum energy from wind. This paper proposes a new method to extract maximum energy from wind turbine systems. The artificial neural network (ANN) is used to estimate the wind speed based on the rotor speed and the output power. In addition to ANN, a predictive controller is used to maximize the efficiency of the boost converter. In predictive controller, duty cycle of boost converter is controlled to obtain the maximum power point based on the slope method. One of the most interesting advantages of this controller is simplicity of control and implementation that is leads to fast response and exact tracking. The method has been developed and analyzed by utilizing a turbine directly driven permanent-magnet synchronous generator (PMSG). The simulation results verify the performance of the proposed method. Results show that this method maximizes wind energy extraction with more accuracy and fastness.

ARTICLE INFO

Keywords:

Boost converter
Neural network
PMSG

Predictive controller
Wind turbine

Article history:

Received February. 16, 2018

Accepted May. 21, 2018

I. INTRODUCTION

Nowadays developed countries place great importance on using renewable energy sources due to their many advantages. As a renewable and non-polluting energy source, wind power has an important role in reducing harmful emissions and the impact of climate change. Since, fossil fuels like coal and oil are subjected to terrible price volatility, greater use of wind energy makes us less dependent on traditional fuels¹.

During last decay, wind turbine systems have been improved with variable speed turbines and directly connected generators. Variable speed wind turbines not only reduce power oscillations and mechanical stresses, but also increase output power and efficiency of the system.

Because of significant progress in the semiconductor devices and power electronics techniques, wind power becomes much more attractive in electrical power systems². By using the methods of maximum power point tracking

for conversion systems of wind-turbine energy, efficiency of wind-turbine generators is increased^{3,4}. In order to track maximum power point in wind turbines for different wind speeds, turbine speed must be changeable through a broad range⁵. In this case, we need to separate generation side from the demand side. So the three phase output voltage of generator should be rectified and the voltage of dc bus should be adjusted. In the power-speed characteristic curve of the turbine there is only a certain load that corresponds to the maximum power of turbine. So in order to obtain maximum power, load should be changed, but this is impossible. In order to overcome this problem, an interface part is considered to utilize the maximum turbine capacity for a constant power and different environmental condition. This interface part is a maximum power point tracker which includes a DC/DC converter and a controller⁶.

Developed algorithms for controllers can be clustered into three control methods, which are named tip speed ratio (TSR) control⁷⁻⁹, power signal feedback (PSF) control¹⁰⁻¹² and hill-climb search (HCS) control¹³. However, there are a lot of proposed methods in the literature. In¹⁴ artificial neural network (ANN) is combined with particle swarm optimization (PSO) to use the maximum power point tracking (MPPT) by controlling the rotor speed of the wind generator. In¹⁵ a variable-speed wind-generator maximum power point tracking (MPPT) based on adaptive neuro-fuzzy inference system (ANFIS) is presented. The optimal speed rotation is predicted by using the variation of the wind speed as the input and implementation of ANFIS model.

In¹⁶ a maximum power point tracking (MPPT) technique for high-performance wind generators with induction generators based on the growing neural gas (GNG) network is presented. A GNG network has been trained offline to learn the specification of turbine surface torque versus wind and machine speeds and has been used online to obtain the wind tangential speed on the basis of the estimated torque and measured machine speed (surface function inversion).

^a m.heidari@uoz.ac.ir, Tel: +98-54-3123-2020, Fax: +98-54-3123-2020, Department of Electrical Engineering, University of Zabol, Zabol, Iran

<http://dx.doi.org/10.22111/ieco.2018.23973.1008>

In this paper, the MPPT algorithm is based on the slope of the wind-turbine mechanical power versus rotation speed. The ANN estimator and the predictive controller of the boost converter are implemented together for improving the accuracy and fastness compared to traditional methods. The uncertainties in the wind turbine system are estimated by neural-network and the duty cycle of dc/dc converter is determined by a predictive controller. The paper is organized as follows: in Section II, the wind turbine and its characteristics are described. In Section III the proposed method is illustrated. Finally, Simulation and results are done in Section IV.

II. DESCRIPTION OF WIND TURBINE

The main parts of the wind conversion systems are: wind turbine, generator, rectifier, dc/dc converter, and control unit. For a wind turbine, the wind power can be expressed as bellow:

$$P_{wind} = \frac{1}{2} \rho A V_w^3 \quad (1)$$

Where ρ is the air density, A is the turbine blade sweep area and V_w is the wind speed. If the friction be neglected, mechanical characteristics of a turbine can be obtained as Eq. (2):

$$T_m - T_{Load} = J \frac{d\omega}{dt} \quad (2)$$

$$P_m - P_{Load} = J\omega \frac{d\omega}{dt} \quad (3)$$

$$P_m = 0.5 \times C_p(\lambda, \beta) \times \rho \times A \times V^3 \quad (4)$$

Where T_m is the mechanical torque of the turbine, T_{load} is the load torque, J is the inertia of the total system, ω is the angular speed of the rotor, P_m is the mechanical power of turbine, V is the wind speed, C_p is the turbine power coefficient, λ is the blade tip speed ratio and β is the blade pitch angle. In Eq. (4), λ is defined as bellow:

$$\lambda = \frac{r\omega}{V_w} \quad (5)$$

Where r is the wind-turbine blade length and ω is the wind turbine rotation speed. C_p is the function of the tip speed ratio λ and the blade pitch angle β . The typical function is¹⁶:

$$C_p(\lambda, \beta) = 0.5176 \times \left(\frac{116}{\lambda_i} - 0.4\beta - 5 \right) \times \frac{-21}{\lambda_i} + 0.0068\lambda \quad (6)$$

where $\frac{1}{\lambda_i} = \frac{1}{\lambda + 0.08\beta} - \frac{0.0035}{1 + \beta^3}$.

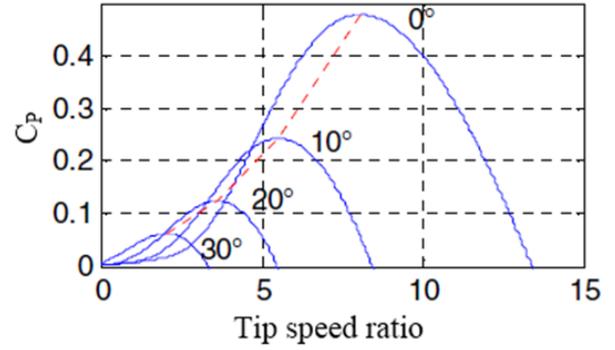


FIG. 1. Wind turbine power coefficient of a wind turbine¹⁷.

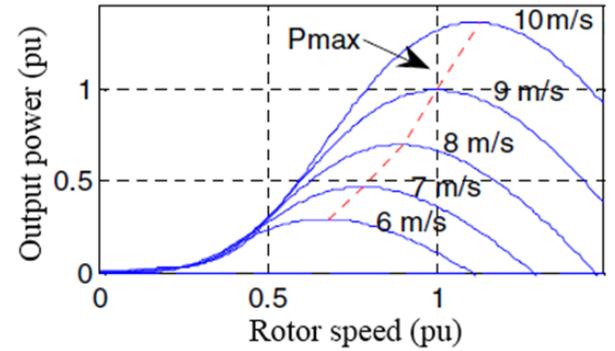


FIG. 2. Power characteristic of a wind turbine¹⁷.

Figure 1 shows that at different blade angles, the power coefficient vary with tip speed ratio¹⁷.

If β is at a given value, C_p has a maximum value of C_{pmax} and λ_{opt} is corresponding to the tip speed ratio. In order to obtain the best power coefficient, we could obtain an optimal line by connecting λ_{opt} points as shown in Fig. 2. If C_p is maximal, the wind turbine output power will be maximized.

III. PROPOSED WIND GENERATION SYSTEM AND CONTROL

In wind generation systems, the output power varies by the wind velocity. In order to obtain the maximum power, wind generation system should operate in variable speed state. To operate in this case, it is necessary to separate the generation part of the system from the consumption part. So, three phase voltage of PMSG generator is rectified by the AC/DC rectifier. From the Eqs. (4) and (5), it can be seen that the maximum turbine power and the corresponding turbine rotor speed are proportional to wind velocity. Hence the wind turbine generation system could be controlled by changing the rotor speed proportional to wind speed to obtain maximum power. Therefore, the wind velocity has an important role in the MPPT algorithm.

The dynamics of wind turbine generation system is

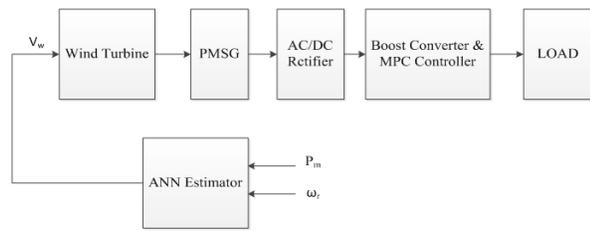


FIG. 3. The proposed wind generation system and its controller.

described as Eq. (7):

$$\frac{dP_e}{d\omega_r} = \frac{dP_m}{d\omega_r} - J \frac{d\omega_r}{dt} - J\omega_r \frac{d^2\omega_r}{d\omega_r dt^2} \quad (7)$$

Where J is the system inertia and P_e is generator power. Figure 3 presents the proposed wind turbine driven PMSG and its controller. This system includes a PMSG driven by a wind turbine, a three phase full wave diode bridge rectifier, an artificial neural network estimator, boost converter and its predictive controller. Firstly, the ANN estimator predicts the wind speed. Then, based on the obtained wind speed, the wind turbine drives the PMSG. Finally, the predictive controller controls the duty cycle boost converter to obtain the maximum efficiency.

A. Wind Velocity Estimation by ANN

The proposed neural network is used to estimate the fast and accurate velocity of wind to avoid using the mechanical sensor (anemometer). In this method, P_m and ω_r are inputs of the neural network which is obtained from mechanical characteristic of turbine according to Eq. (4) and neural network is configured with 2 linear neurons as input layer, 5 sigmoid neurons in hidden layer and 1 neuron in output layer.

In order to train the neural network, the method of back propagation with Levenberg-Marquardt back propagation training function and mean square error (MSE) with 1000 samples of rotor speed and output power are used. Also, wind velocity samples are used as target of the ANN training as shown in Fig. 4.

B. Predictive Controller Design for Boost Converter

The predictive model of controller is implemented to estimate the future behavior of the controlled variables so that proper control actions could be determined^{18,19}. A DC/DC boost converter is used to control the V_{dc} in order to extract the maximum power from the system. In predictive controller, output voltage of converter is compared with reference value and is used to obtain the maximum power point based on the slope method. Then,

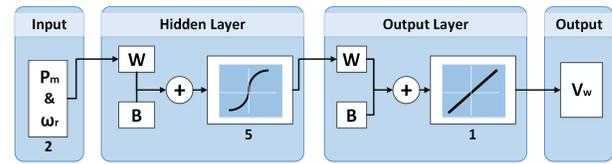


FIG. 4. The proposed artificial neural network²¹.

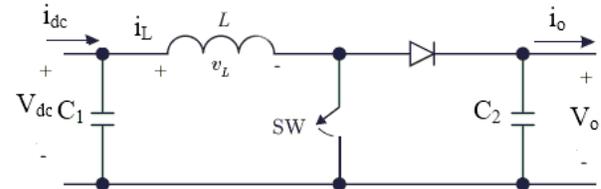


FIG. 5. Boost converter²⁰.

PWM control method is used for controlling of duty cycle of DC/DC boost converter. One of the most interesting advantages of this controller is simplicity of control and implementation that is leads to fast response and exact tracking. As it can be seen from the Fig. 5, the operation of the converter can be described as follows when the switch is closed ($S = 1$).

$$\begin{aligned} \frac{di_L}{dt} &= \frac{v_{dc}}{L} \\ \frac{dv_{dc}}{dt} &= -\frac{i_L}{C_1} + \frac{i_{dc}}{C_1} \\ \frac{dv_o}{dt} &= -\frac{v_o}{RC_2} \end{aligned} \quad (8)$$

When the switch is opened ($S = 0$), we have:

$$\begin{aligned} \frac{di_L}{dt} &= \frac{v_{dc}}{L} - \frac{v_o}{L} \\ \frac{dv_{dc}}{dt} &= -\frac{i_L}{C_1} + \frac{i_{dc}}{C_1} \\ \frac{dv_o}{dt} &= \frac{i_L}{C_2} - \frac{v_o}{RC_2} \end{aligned} \quad (9)$$

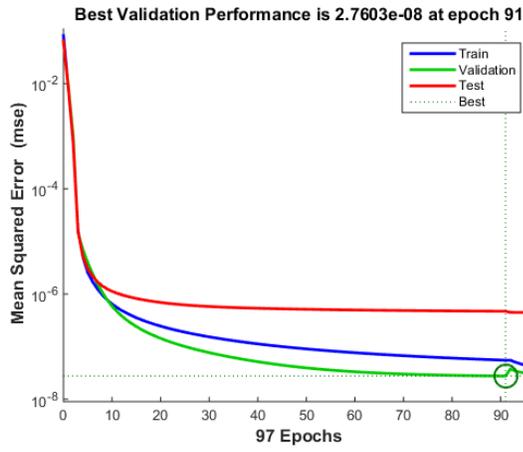


FIG. 6. Performance of the ANN.

Discrete form of the system can be written as follows:

$$\begin{aligned}
 i_L(k+1) &= i_L(k) + \frac{T_S}{L} v_{dc}(k) - \frac{T_S}{L} v_o \\
 v_{dc}(k+1) &= -\frac{T_S}{C_1} i_L(k) + v_{dc}(k) + \frac{T_S}{C_1} i_{dc}(k) \\
 v_o(k+1) &= -\frac{T_S}{C_2} i_L(k) + (1 - \frac{T_S}{RC_2}) v_o(k) \\
 i_L(k+1) &= i_L(k) + \frac{T_S}{L} v_{dc}(k) \\
 v_{dc}(k+1) &= -\frac{T_S}{C_1} i_L(k) + v_{dc}(k) + \frac{T_S}{C_1} i_{dc}(k) \\
 v_o(k+1) &= (1 - \frac{T_S}{RC_2}) v_o(k)
 \end{aligned} \tag{10}$$

The cost function for states of open and close switch is defined in Eq. (11)²¹:

$$\begin{aligned}
 J_{S=0,1}^1 &= w_A \cdot |v_o(k+1)_S v^*|^2 \\
 &+ w_B \cdot |i_L(k+1)_S - i^*|^2
 \end{aligned} \tag{11}$$

Where w_A and w_B are penalty coefficient of voltage and current with dimensions of $1/V$ and $1/A$ which are selected 4 and 27 respectively. The efficiency of the system is defined as below:

$$\eta = \frac{P_{MPPT}}{P_{ac}} \tag{12}$$

Where P_{MPPT} is the output of controller and P_{ac} is the output power.

IV. SIMULATION RESULTS

The proposed wind generation system is simulated by using MATLAB/SIMULINK. The parameters of wind

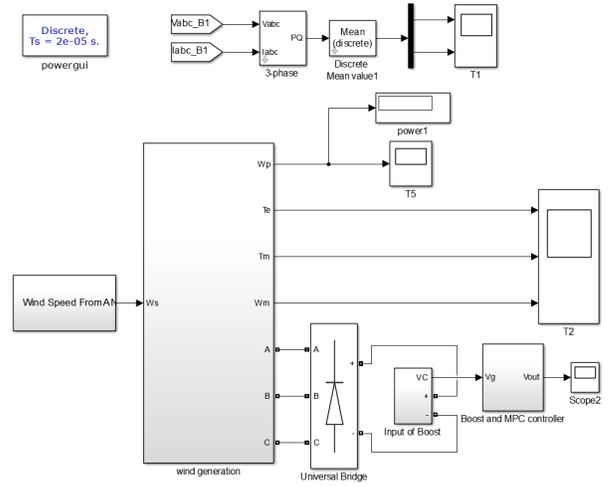
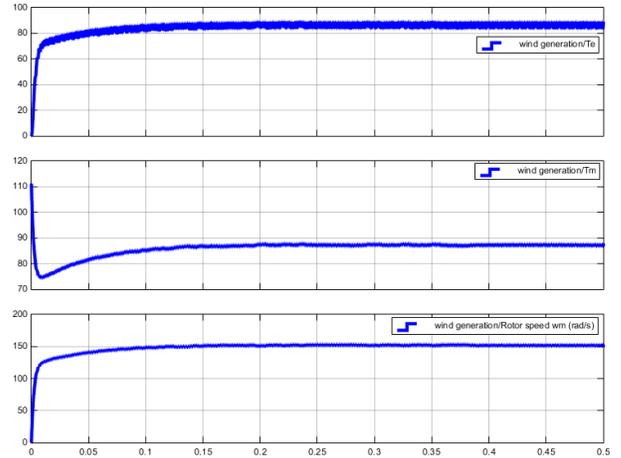


FIG. 7. View of implemented system in MATLAB/Simulink.

FIG. 8. Output of the wind generation system, (a) T_c : electrical Torque, (b) T_m : Mechanical Torque, (c) rotor speed.

turbine and generator are in Table I and Table II in the appendix.

As it has been explained in pervious section, firstly the ANN estimates the wind velocity. The performance of the neural network is shown in Fig. 6. We have run the ANN network and the estimated wind velocity of 14.6 m/s is obtained. This figure shows that desired performance of ANN estimator. Figure 7 shows the view of implemented system in MATLAB/SIMULINK. The simulation results are shown in Figs. 8-10. Figure 8 shows the output of the wind generation system for 0.3 sec . Figure 8a is the electrical torque of the turbine and the Fig. 8b is the mechanical torque and Fig. 8c is the rotor speed. As it could be seen the torque follows the rotor speed. Moreover, Fig. 9 shows the Wind speed, Rotor speed, Pitch angle, Electrical torque, and mechanical Torque of the turbine generation system. Figure 10 shows the output of the generator includes output voltage (rms), line current (rms) and output power of PMSG (P_{ac}). Hence,

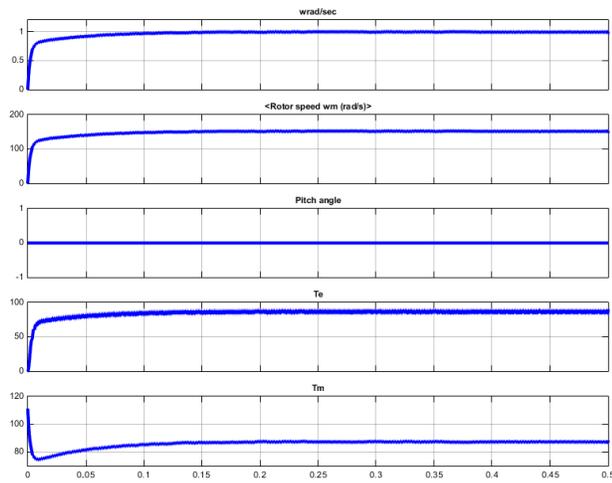


FIG. 9. (a) Wind speed (rad/s), (b) Rotor speed (rad/s), (c) Pitch angle (deg), (d) Electrical torque T_e , (e) Mechanical Torque T_m .

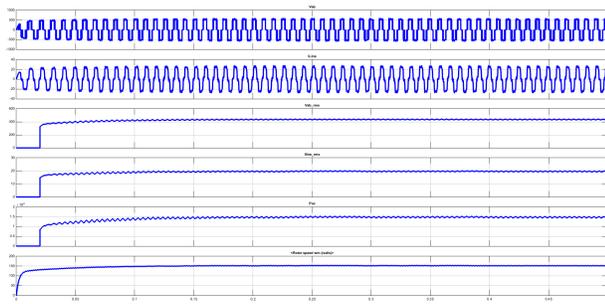


FIG. 10. Output of the generator, (a) Output voltage (rms), (b) Line current (rms), (c) output power of PMSG (P_{ac}), (d) rotor speed.

by analyzing these figures, it can be observed that the turbine operates with a C_p close to the optimal value and that means that electrical power is equal to mechanical power. Figure 11 shows the efficiency of the system and the duty cycle of boost converter. As can be seen from figure, the duty cycle of the boost converter is optimized and the proposed system can track the maximum power point exactly.

V. CONCLUSIONS

In this paper, the ANN estimator and the predictive controller of the boost converter is presented together. A neural network is used to estimation of wind velocity. The neural networks inputs are rotor speed and the output power. The estimated wind speed is the output of the ANN that is used in the wind generation system. Moreover, predictive controller is used to maximize the efficiency of the boost converter. The simulation results proved the performance of the proposed method. Compared to the traditional control strategies, the pro-

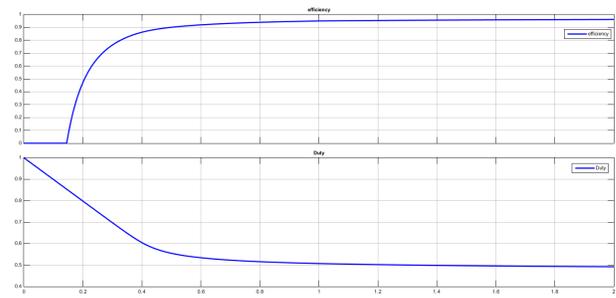


FIG. 11. (a) Efficiency of the system, (b) Duty cycle of the boost converter.

TABLE I. Parameters of wind turbine

Nominal power	12 KW
Nominal wind velocity	12 m/s
Turbine radius	3 m
C_{pmax}	0.665
λ_{opt}	10.97
Pitch angle	0 deg

posed method has a higher performance for extraction of mechanical power and is comparatively easy and high practical value with easy hardware implementation.

APPENDIX

The parameters of wind turbine and generator are expressed in Table I and Table II.

REFERENCES

- L. H. Hansen, L. Helle, F. Blaabjerg, E. Ritchie, S. M. Nielsen, H. Bindner, P. Sørensen, and B. B. Jensen, "Conceptual survey of generators and power electronics for wind turbines," *Risø National Laboratory, Roskilde, Denmark*, 1205, pp.71-73, 2001.
- S. A. Gawish, S. M. Sharaf, and M. S. El-Harony, "Voltage Stabilization of a Wind Turbine with STATCOM Using Intelligent Control Techniques," *Indonesian Journal of Electrical Engineering and Informatics (IJEI)*, Vol. 4, No. 1, pp. 24-34, 2016.
- M. F. Tsai, C. S. Tseng, and Y. H. Hung, "A novel MPPT control design for wind-turbine generation systems using neural network compensator," *In IECON 2012-38th Annual Conference on IEEE Industrial Electronics Society*, pp. 3521-3526, 2012.
- A. Zare, and A. Forouzantabar, "Adaptive Robust Control of Variable Speed Wind Turbine Generator," *Bulletin of Electrical Engineering and Informatics*, Vol. 4, No. 3, pp. 196-203, 2016.
- D. V. N. Ananth, and V. N. Kumar, "Flux Based Sensorless Speed Sensing and Real and Reactive Power Flow Con-

TABLE II. Parameters of generator

Nominal power	13.7 KW
Phase resistance	0.0495 Ω
Phase inductance	0.831 mH
Flux linkage	0.435 V.s.
Number of poles	5
Total inertia of turbine and generator	0.035 kgm^2

- trol with Look-up Table based Maximum Power Point Tracking Technique for Grid Connected Doubly Fed Induction Generator," *Indonesian Journal of Electrical Engineering and Informatics (IJEEI)*, Vol. 3, No. 4, pp. 239-260, 2015.
- ⁶R. Alik, A. Jusoh, and T. Sutikno, "A review on perturb and observe maximum power point tracking in photovoltaic system," *TELKOMNIKA (Telecommunication Computing Electronics and Control)* Vol. 13, No. 3, pp. 745-751, 2015.
- ⁷S. Bhowmik, R. Spee, and J. H. R. Enslin, "Performance optimization for doubly-fed wind power generation systems," *In Industry Applications Conference, 1998. Thirty-Third IAS Annual Meeting. The 1998 IEEE*, Vol. 3, pp. 2387-2394, 1998.
- ⁸M. Chinchilla, S. Arnaltes, and J. C. Burgos, "Control of permanent-magnet generators applied to variable-speed wind-energy systems connected to the grid," *IEEE Transactions on Energy Conversion*, Vol. 21, No. 1, pp. 130-135, 2006.
- ⁹H. Li, K. L. Shi, and P. G. McLaren, "Neural-network-based sensorless maximum wind energy capture with compensated power coefficient," *IEEE Transactions on Industry Applications*, Vol. 41, No. 6, pp. 1548-1556, 2005.
- ¹⁰R. Chedid, F. Mrad, and M. Basma, "Intelligent control of a class of wind energy conversion systems," *IEEE Transactions on Energy Conversion*, Vol. 14, No. 4, pp. 1597-1604, 1999.
- ¹¹R. M. Hilloowala, and A. M. Sharaf, "A rule-based fuzzy logic controller for a PWM inverter in a stand alone wind energy conversion scheme," *IEEE Transactions on Industry Applications*, Vol. 32, No. 1, pp. 57-65, 1996.
- ¹²K. Tan, and S. Islam, "Optimum control strategies in energy conversion of PMSG wind turbine system without mechanical sensors," *IEEE Transactions on Energy Conversion*, Vol. 19, No. 2, pp. 392-399, 2004.
- ¹³M. G. Simoes, B. K. Bose, and R. J. Spiegel, "Fuzzy logic based intelligent control of a variable speed cage machine wind generation system," *IEEE Transactions on Power Electronics*, Vol. 12, No. 1, pp. 87-95, 1997.
- ¹⁴C. Y. Lee, Y. X. Shen, J. C. Cheng, Y. Y. Li, and C. W. Chang, "Neural networks and particle swarm optimization based MPPT for small wind power generator," *World Academy of Science, Engineering and Technology* Vol. 60, pp. 17-23, 2009.
- ¹⁵A. Meharrar, M. Tioursi, M. Hatti, and A. B. Stambouli, "A variable speed wind generator maximum power tracking based on adaptative neuro-fuzzy inference system," *Expert Systems with Applications*, Vol. 38, No. 6, pp. 7659-7664, 2011.
- ¹⁶M. Pucci, and M. Cirrincione, "Neural MPPT control of wind generators with induction machines without speed sensors," *IEEE Transactions on Industrial Electronics*, Vol. 58, No. 1, pp. 37-47, 2011. Harvard
- ¹⁷D. Liu, Z. Wu, H. Wang, and T. Wang, "MPPT control strategy for off-grid wind power system," *In Power Electronics for Distributed Generation Systems (PEDG), 2010 2nd IEEE International Symposium on*, pp. 759-764, 2010.
- ¹⁸S. Kouro, P. Cortes, R. Vargas, U. Ammann, and J. Rodriguez, "Model predictive control-A simple and powerful method to control power converters," *IEEE Transactions on Industrial Electronics*, Vol. 56, No. 6, pp. 1826-1838, 2009.
- ¹⁹J. Rodriguez, J. Pontt, C. A. Silva, P. Correa, P. Lezana, P. Cortes, and U. Ammann, "Predictive current control of a voltage source inverter," *IEEE Transactions on Industrial Electronics*, Vol. 54, No. 1, pp. 495-503, 2007.
- ²⁰M. H. Rashid, "Power electronics: circuits, devices, and applications," *India: Pearson Education*, 2009.
- ²¹M. Heidari, "Improving efficiency of photovoltaic system by using neural network MPPT and predictive control of converter," *International Journal of Renewable Energy Research (IJRER)*, Vol. 6, No. 4, pp. 1524-1529, 2016.

Mahdi Heidari was born in 1983 in Zabol, Iran. He received the B.Sc. degree in electrical engineering from University of Sistan and Baluchestan, Zahedan, Iran in 2005 and M.Sc. degree in electrical engineering from Shahid Chamran University of Ahvaz, Ahvaz, Iran in 2008. Currently, he is a Lecturer in Department of Electrical Engineering, University of Zabol, Zabol, Iran. His research interests are renewable energy, power electronics and FACTS devices.

